BATTERY CHARGING *QUICK STEPS*

For SpeedCharge™ Model SC-300A Battery Charger/Maintainer

SAFETY FIRST!

For Safety Warnings, refer to Owner's Manual

Note: A marine (boat) battery installed in a boat must be removed and charged on shore.

Steps To Take Before Using Your Battery Charger

See pages 3 & 4 of the Owner's Manual for all cautionary warnings.

1. Charger requires 3-prong grounded 120V AC electrical outlet.
2. Keep hands, hair, clothing and jewelry clear of fan blades, belts, pulley and other engine parts.
3. Keep the power cord and output cords away from the hood, door and/or moving engine parts.
4. Wear safety glasses.
5. Charge battery in a well-ventilated area.

Getting Your Battery Ready for Charging

1. If necessary, clean the battery terminals as well as possible. Wear rubber gloves and safety glasses to avoid contact with battery acid.
2. For batteries with removable vent caps, see page 5 of Owner's Manual for more details.

Connecting Your Battery Charger

1. Attach RED clamp to positive (+) battery terminal. Refer to picture. (Negative Ground System)
2. Attach BLACK clamp to negative (-) ground on an unpainted frame part or engine block of vehicle.
3. Then, plug charger into a 120V AC electrical outlet. Simply reverse the steps to disconnect.

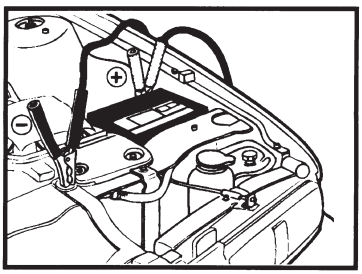

OVER

00-99-000638/0306

Charging Your Battery

1. The amber CHARGING LED will turn on and stay on until the battery is charged. If the CHECK BATTERY LED is on, check for correct cable connections. See page 9 of the Owner's Manual for more details.
2. The green CHARGED LED will turn on after the battery is charged and the charger will automatically change to Maintain Mode. See page 7 of the Owner's Manual for more details.
3. To immediately use your vehicle, unplug the battery charger from the AC outlet, remove the battery charger's clamps from the vehicle and have a great day!

SEE OWNER'S MANUAL FOR MORE DETAILS.

Schumacher® ELECTRIC CORPORATION

Questions? Call Customer Service
7 am to 4:30 pm CST Monday through Friday

1-800-621-5485